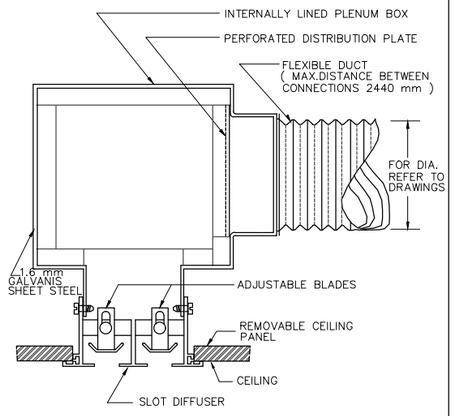

PLENUM BOX DETAIL FOR SLOT LINIER DIFFUSER

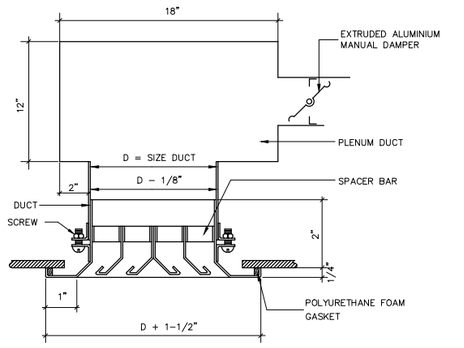

STANDARD CONSTRUCTION

FRAME: 22 gage (0.0312 in. thk.) steel sheet with 1 in. flange

LOUVERS: 22 gage (0.0312 in. thk.) steel sheet Fixed type. 45° deflection, 1 in. spacing.

FINISH: Off white oven baked enamel. Other finishes are available.

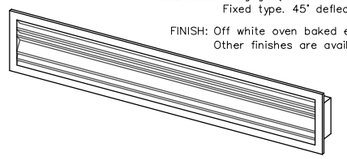

LINEAR GRILLE DETAIL (TWO-WAY DEFLECTION)

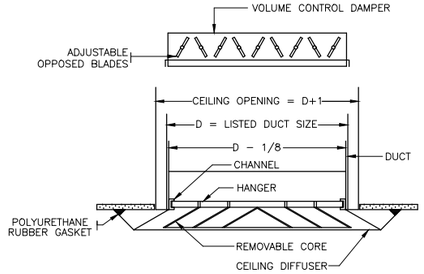

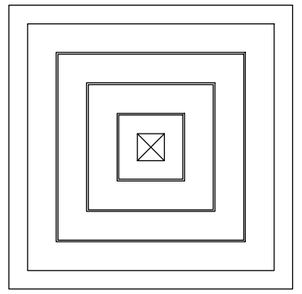

SUPPLY AIR DIFFUSER DETAIL

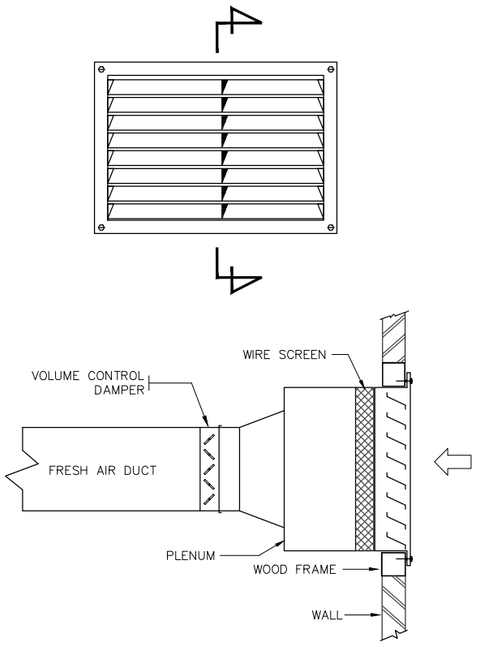

FRESH AIR INTAKE LOUVER DETAIL

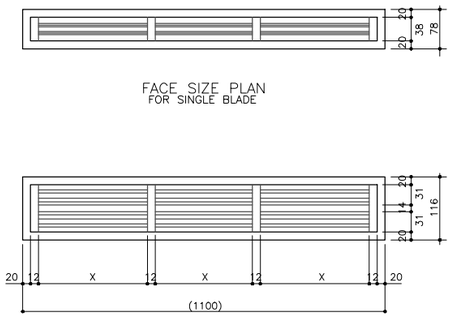

PLENUM BOX DETAIL FOR SLOT LINIER DIFFUSER

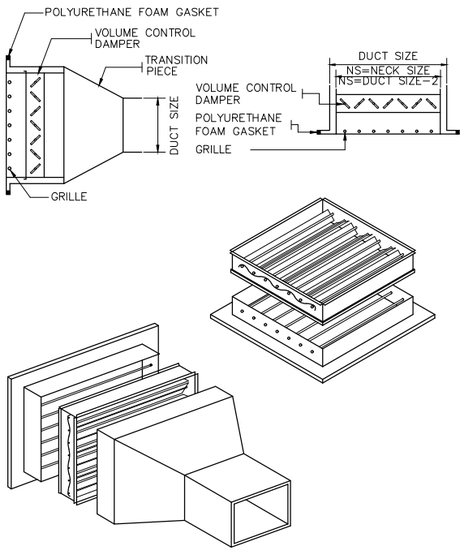

EXHAUST / RETURN AIR GRILLE DETAIL

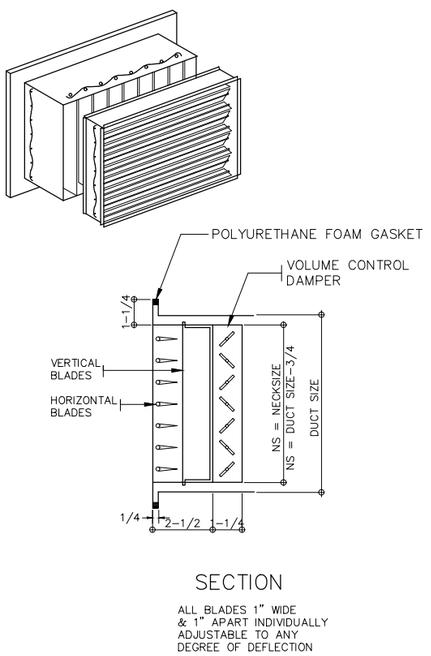

SECTION

ALL BLADES 1" WIDE & 1" APART INDIVIDUALLY ADJUSTABLE TO ANY DEGREE OF DEFLECTION

DOUBLE – DEFLECTION SUPPLY AIR REGISTER DETAIL

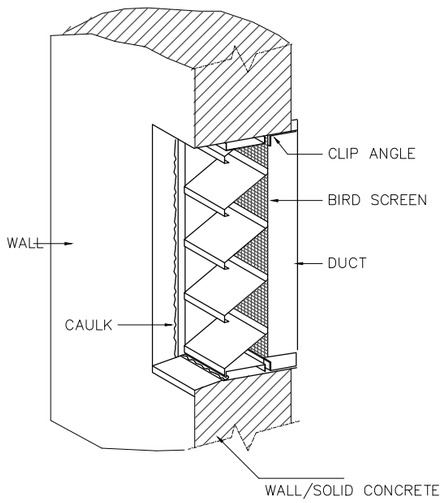

FIXED LOUVER DETAIL

OWNER/CLIENT

sawit

APPROVED : .../.../'...

..... (name)
..... (position)
(signed) ..... (Dep./Div.)

PROJECT

BPDP
KELAPA SAWIT

JL.Medan Merdeka Tim, RT.7/RW.1, Gambir, Kec. Gambir, Kota Jakarta Pusat, Daerah Khusus Ibukota Jakarta 10110

INTERIOR DESIGN CONSULTANT

PT. IMADEA MAGKASAMA

Jl. Hati Suci No. 4 Gd. Sakura Lt. 2 Room 201
Kel. Kampung Bali, Kec. Tanah Abang, Jakarta Pusat
Telp. 021 - 2303483 , Fax. 021 - 2303483
APPROVED : //

MEP CONSULTANT

PT. DUTA PRATAMA ENGINEERING
MECHANICAL & ELECTRICAL ENGINEER
Rukan Taman Meruya Blok M No. 37, Jl. Batu Mulia No. 1
Meruya Utara Kembangan – Jakarta Barat 11620
Phone : 021-5845546, 5845547, 5845556, Fax : 021-58474531
Email : dpep1.me@gmail.com, pt.dpe.me@yahoo.com

DRAWING TITLE

DETAIL UMUM TERMINAL UDARA

SCALE : NTS

ALL MEASUREMENT MUST BE CHECKED AT BY SITE BY THE CONTRACTORS AND ANY DIFFERENCES REPORTED/INITIATED TO THE DESIGNER FOR CLARIFICATION BEFORE PROCEEDING.

#	REVISION :	DATE
...		.../.../'...
...		.../.../'...
...		.../.../'...
...		.../.../'...
...		.../.../'...

DRAWN
Iqbal
DATE : 15/05/24

CHECKED
Dhono
DATE : 15/05/24

DRAWING NUMBER
VAC-403

PAGE

DRAWING FOR
TENDER

DATE : 2024/05/10